Environmental Product Declaration





In accordance with ISO 14025:2006 and EN 15804:2012+A2:2019/AC:2021 for:

Glass partition

from

Trehøje Døre A/S



Programme: The International EPD® System, <u>www.environdec.com</u>

Programme operator: EPD International AB

EPD registration number: S-P-12183
Publication date: 2024-02-02
Valid until: 2029-02-01

EPD of multiple products, based on the worst-case results

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to the continued registration and publication at www.environdec.com







General information

Programme information

Programme:	The International EPD® System					
Address	EPD International AB					
	Box 210 60					
Address:	SE-100 31 Stockholm					
	Sweden					
Website:	www.environdec.com					
E-mail:	info@environdec.com					

Accountabilities for PCR, LCA and independent, third-party verification							
Product Category Rules (PCR)							
CEN standard EN 15804:2012 +A2 (2019) serves as the Core Product Category Rules (PCR)							
Product Category Rules (PCR): Construction products, 2019:14, Version 1.3.1							
PCR review was conducted by: <i>The Technical Committee of the International EPD® System.</i> Claudia A. Peña. <i>Contact via info@environdec.com</i>							
Life Cycle Assessment (LCA)							
LCA accountability: Amy Stockwell, Carbon Zero AB, amy.stockwell@eando.se							
Third-party verification							
Independent third-party verification of the declaration and data, according to ISO 14025:2006, via:							
Third-party verifier: Vladimir Koci, vladimir.koci@lcastudio.cz							
Approved by: The International EPD® System							
Procedure for follow-up of data during EPD validity involves third party verifier:							
☐ Yes							

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.





Company information

Owner of the EPD: Trehøje Døre A/S

Contact: Ramus Budde Rasmus@Trehoeje.dk

<u>Description of the organisation:</u> Trehøje Døre A/S is a leading Danish manufacturer of internal doors equipped with cutting-edge production technology. We specialise in delivering tailored door solutions that prioritise customer needs, incorporating fire and sound certifications. Committed to sustainability, we take conscientious measures in our production processes.

<u>Product-related or management system-related certifications:</u> Dansk Dørkontrol, SBC 210, SBC214, FSC

Name and location of production site(s): Ørnhøj, Denmark

Product information

Product name: Glass partition

Products included: Uklassificeret, F30, F60, BD30, BD60

<u>Product description:</u> Our glass partitions contribute a distinctive touch to buildings by allowing ample light and ensuring clear visibility, and elevating architectural aesthetics. The partitions are designed with wooden frames and glazing beads, showcasing an elegant design, free from visible screws.

UN CPC code: 88319

Geographical scope: Products are made and sold in Denmark

LCA information

Functional unit / declared unit: 1 m² of glass partition

Calculations are based on a glass partition of size 930 x 2045 mm (WxH)

Reference service life: The Reference Service Life (RSL) is not included in this report, as per the draft c-PCR for doors and windows, this should only be included if the B modules are included.


<u>Time representativeness:</u> Manufacturing data is from 2022.


Database(s) and LCA software used: LCA for Experts (GaBi) v 10.7.1.28 and Ecoinvent v 3.8

Description of system boundaries: Cradle to gate with options: A1-A3, A4-A5 + C + D







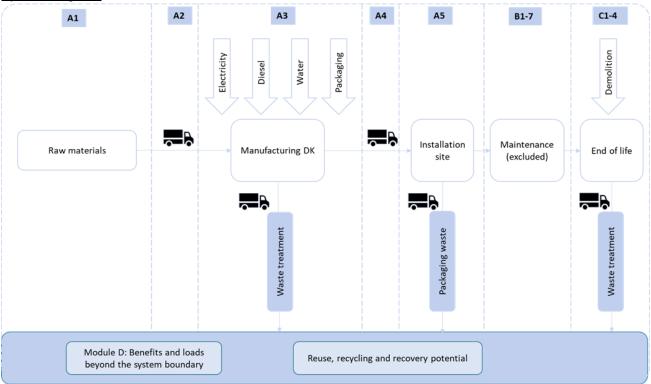

More information:

Module A3: The manufacturer's electricity grid mix comes 100% from wind power. It has a GHG-GWP of 9.3 E-03 kg CO2e per kWh.

Module A5: The product is installed by hand. The pallet was assumed reuseable and the other packaging recycled. The biogenic carbon is virtually emitted.

Modules C and D: The product is assumed disposed of as per Statbank Denmark data on construction waste, as listed in the table below. C4 also includes the virtual biogenic carbon emissions of the materials which are recycled.

Material	Recycling rate	Incineration rate	Landfill rate
Construction waste	93 %	3 %	4 %





Modules declared, geographical scope, share of specific data (in GWP-GHG results) and data variation (in GWP-GHG results):

	Pro	duct sta	age	prod	ruction cess ige			Us	se sta	ge			End of life stage				Resource recovery stage
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential
Module	A 1	A2	А3	A4	A5	B1	B2	В3	В4	B5	В6	В7	C1	C2	С3	C4	D
Modules declared	Х	Х	Х	Х	Х	-	- 1	-	ı	-	-	ī	Х	х	Х	Х	Х
Geography	EU	EU	DK	DK	DK	ND	ND	ND	ND	ND	ND	ND	DK	DK	DK	DK	DK
Specific data used		ry specifi sed for A		-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – products		>10%		-	-	-	-	-	-	-	-	-	-	-	-	-	-
Variation – sites		0%		-	-	-	-	-	-	-	-	-	-	-	-	-	-

Multiple partitions are included in this EPD. The worst case scenario results are shown.

Using the results of modules A1-A3 without considering the results of module C is discouraged.





Content information

Product components	Weight, kg	Post-consumer material, weight %	Biogenic material Weight % kg C/kg		
Wood	7.5E+00	0	10%	3.1E+00	
Paint and adhesive	4.7E-01	0	0	0	
Steel	7.0E-01	14 %	0	0	
Glass	2.1E+01	0	0	0	
Plastic	2.0E+00	0	0	0	
TOTAL	3.1E+01	0.003 %	10 %	3.1E+00	
Packaging materials	Weight, kg	Weight-% (versus the product)	Weight biogenic ca	rbon, kg C/kg	
PE film	8.0E-02	0.3%	0		
Pallet	8.8E-01	2.8%	3.7E-01		
Total	9.6E-01	3.1%	3.76	E-01	

No substances that appear in the REACH candidate list of SVHC (Candidate List of Substances of Very High Concern) are present or used in the product concerning this EPD.





Results of the environmental performance indicators

Mandatory impact category indicators according to EN 15804

Mariaat	ory impa	or carege			al or declared		/-		
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D
GWP-fossil	kg CO ₂ eq.	4.18E+01	2.79E-01	7.35E-02	1.75E-02	2.05E-01	4.90E-01	0	-3.04E+01
GWP-biogenic	kg CO ₂ eq.	-2.77E+01	0	1.55E+01	-2.37E-04	0	1.37E+00	1.08E+01	1.17E+01
GWP- luluc	kg CO ₂ eq.	5.70E-02	2.58E-03	6.79E-04	1.59E-04	1.89E-03	5.13E-05	0	-3.41E+00
GWP- total	kg CO ₂ eq.	1.42E+01	2.82E-01	1.56E+01	1.74E-02	2.07E-01	1.86E+00	1.08E+01	-2.21E+01
ODP	kg CFC 11 eq.	9.58E-07	3.29E-14	6.42E-15	2.23E-15	2.41E-14	2.69E-13	0	-1.18E-10
AP	mol H ⁺ eq.	3.02E-01	5.27E-04	8.44E-05	8.95E-05	3.88E-04	7.25E-04	0	-2.00E-01
EP-freshwater	kg P eq.	1.20E-03	1.02E-06	2.67E-07	6.27E-08	7.53E-07	2.40E-05	0	-1.74E-03
EP- marine	kg N eq.	7.76E-02	2.18E-04	2.91E-05	4.20E-05	1.60E-04	4.30E-04	0	-5.47E-02
EP-terrestrial	mol N eq.	8.75E-01	2.49E-03	3.43E-04	4.65E-04	1.83E-03	3.15E-03	0	-5.59E-01
POCP	kg NMVOC eq.	1.86E-01	4.70E-04	7.34E-05	1.17E-04	3.45E-04	1.06E-03	0	-1.04E-01
ADP- minerals&metals	kg Sb eq.	3.09E-05	1.83E-08	4.76E-09	1.14E-09	1.35E-08	1.40E-09	0	-6.14E-06
ADP-fossil*	MJ	6.55E+02	3.83E+00	9.97E-01	2.33E-01	2.82E+00	1.34E+00	0	-4.64E+02
WDP*	m³	7.27E+00	3.59E-03	8.45E-04	2.07E-04	2.64E-03	1.38E-01	0	-1.70E+00
Acronvms	GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment;								

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching freshwater end compartment; EP-marine = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-terrestrial = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

^{*} Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.





Additional mandatory and voluntary impact category indicators

	Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D		
GWP-GHG ¹	kg CO ₂ eq.	4.22E+01	9.88E-01	7.44E-02	1.77E-02	2.07E-01	1.29E+00	0	-3.40E+01		
GWP ²	kg CO ₂ eq.	1.37E+01	2.74E-01	1.56E+01	1.71E-02	2.01E-01	1.73E+00	0	-1.85E+01		
Acronyms	cronyms GWP-GHG global warming potential - greenhouse gases;										

¹This indicator accounts for all greenhouse gases except biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. As such, the indicator is identical to GWP-total except that the CF for biogenic CO₂ is set to zero.

Resource use indicators

	Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A 5	C1	C2	C3	C4	D		
PERE	MJ	4.98E+02	3.12E-01	7.06E-02	1.70E-02	2.30E-01	1.78E-01	0	-1.67E+02		
PERM	MJ	0	0	0	0	0	0	0	0		
PERT	MJ	4.98E+02	3.12E-01	7.06E-02	1.70E-02	2.30E-01	1.78E-01	0	-1.67E+02		
PENRE	MJ	6.55E+02	3.84E+00	1.00E+00	2.34E-01	2.82E+00	1.34E+00	0	-4.64E+02		
PENRM	MJ	0	0	0	0	0	0	0	0		
PENRT	MJ	6.55E+02	3.84E+00	1.00E+00	2.34E-01	2.82E+00	1.34E+00	0	-4.64E+02		
SM	kg	8.79E-01	0	0	0	0	0	0	0		
RSF	MJ	0	0	0	0	0	0	0	0		
NRSF	MJ	0	0	0	0	0	0	0	0		
FW	m ³	3.15E-01	3.59E-04	7.78E-05	1.86E-05	2.64E-04	3.26E-03	0	-1.86E-01		
	renewable	primary energy	resources used	as raw materials	; PERT = Total u	use of renewable	sed as raw mate primary energy raw materials: P	resources; PEN	RE = Use of		

Acronyms

renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy resources used as raw materials; PENRT = Total use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water

²This indicator supports comparability with EPDs based on the previous version of EN 15804 (EN 15804:2012+A1:2013).





Waste indicators

	Results per functional or declared unit											
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D			
Hazardous waste disposed	kg	7.83E-09	4.63E-12	3.70E-12	7.26E-13	3.40E-12	9.19E-11	0	-3.10E-08			
Non- hazardous waste disposed	kg	3.77E+00	6.04E-04	1.44E-04	3.57E-05	4.44E-04	1.02E+00	0	-1.73E+00			
Radioactive waste disposed	kg	9.43E-03	2.17E-05	1.29E-06	4.39E-07	1.60E-05	3.14E-05	0	-1.42E-02			

Output flow indicators

Results per functional or declared unit										
Indicator	Unit	A1-A3	A4	A5	C1	C2	C3	C4	D	
Components for re-use	kg	0	0	9.34E+00	0	0	0	0	0	
Material for recycling	kg	0	0	9.60E-01	0	0	2.66E+01	0	0	
Materials for energy recovery	kg	0	0	0	0	0	0	0	0	
Exported energy, electricity	MJ	0	0	0	0	0	1.39E+00	0	0	
Exported energy, thermal	MJ	0	0	0	0	0	2.40E+00	0	0	

References

EN 15804:2012+A2	Sustainability of construction works – Environmental product declaration – Core rules for the product category of constructions products
EN 17213:2020	Windows and Doors – Environmental Product Declarations – Product category rules for windows and pedestrian doorsets
EPD International (2021)	General Programme Instructions of the International EPD® System, version 4.0
ISO 14020:2022	International Standard ISO 14020 – Environmental statements and programmes for products – Principles and general requirements
ISO 14025:2006	International Standard ISO 14025 – Environmental labels and declarations — Type III environmental declarations — Principles and procedures
ISO 14040:2006	International Standard ISO 14040: Environmental Management – Life cycle assessment – Principles and framework. Second edition 2006-07-01.
ISO 14044:2006	International Standard ISO 14044: Environmental Management – Life cycle assessment – Requirements and Guidelines.





PCR 2019:14 PCR 2019:14 Construction products (EN 15804:A2) v1.3.1

Statbank (2020) <u>www.statbank.dk/statbank5a/selectvarval/saveselections.asp</u> accessed 2023-

10-17

Contact information

	,
EPD owner:	Trehøje Døre & Rasmus Budde Email: Rasmus@trehoeje.dk Telephone: +45 96926012 Address: Fabriksvej 6, DK-6973 Ørnhøj
LCA author:	Eando AB is part of CarbonZero AB Amy Stockwell Email: Amy.Stockwell@eando.se Telephone: +44 7746 175762 Address: CarbonZero AB, Tåstrupsgatan 2, SE-262 63 Ängelholm
Third party verifier:	LCA Studio Vladimír Kocí Email: <u>Vladimir.Koci@lcastudio.cz</u> Telephone: +420 608 055 972 Address: LCA Studio, Šárecká 1962/5, 160 00 Praha 6, CZ
Program operator:	EPD International AB info@environdec.com